



## VS 630-4D



Inline centrifugal fans with backward curved blades in heat- and sound-insulated casing


- Maximum airflow: 15170
- Sound pressure level LpA at 3 m: 67
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Aluzinc
- Installation in any position

	Unit of measurement	VS 630-4D
Connected air duct size	mm	630
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	3310
Unit current	A	6.2
Maximum airflow	m <sup>3</sup> /h	15170
Sound pressure level LpA at 3 m	dB(A)	67
Weight	kg	102
Transported air temperature (max)	°C	35
Transported air temperature (min)	°C	-40
Ingress protection rating	-	IPX4

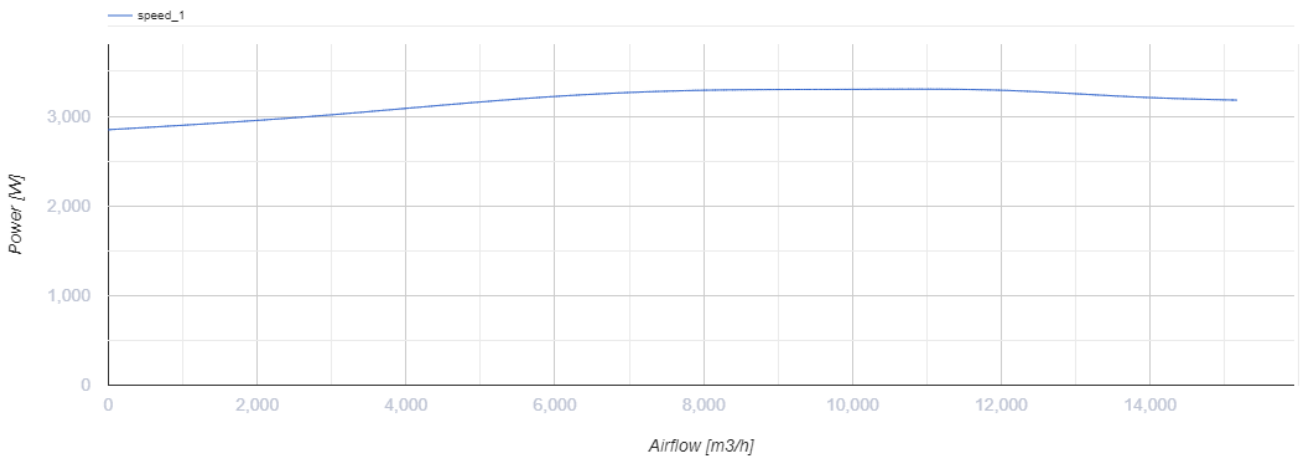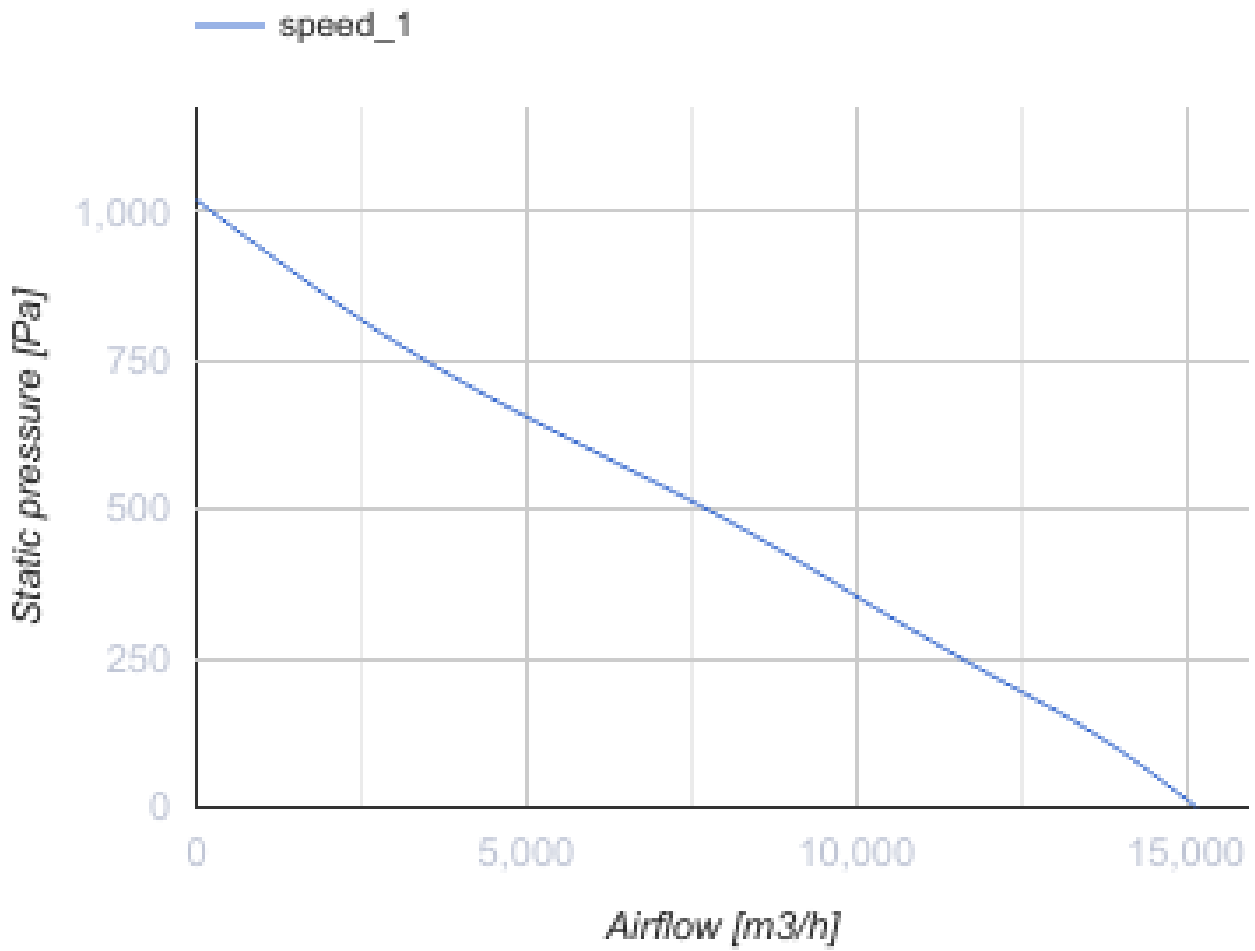

### Dimensions

<b>A</b>
800

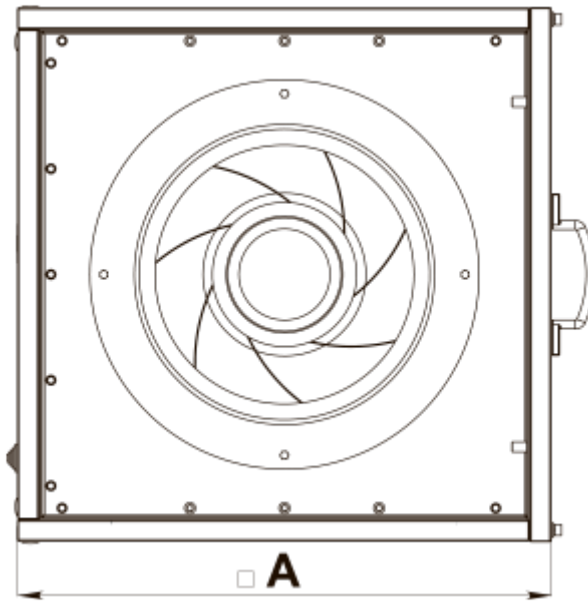

## Ecodesign

Trademark	Vents
Model	VS 630-4D
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	2.251
Nominal external pressure (Pa)	471
Maximum external leakage rates (%)	2.7
Static efficiency (%)	33
Declared typology	NRVU UVU
Sound power level (dB(A))	87
Effective electric power input (kW)	3.276