




# VSK 500 E EC




Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C with EC-motors

- Maximum airflow: 10500
- Sound pressure level LpA at 3 m: 63
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position


	Unit of measurement	VSK 500 E EC
Connected air duct size	mm	500
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	1500
Unit current	A	10.5
Maximum airflow	m <sup>3</sup> /h	10500
rotation speed at 50hz	-	1500
Sound pressure level LpA at 3 m	dB(A)	63
Weight	kg	95.5
Transported air temperature (max)	°C	120
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4

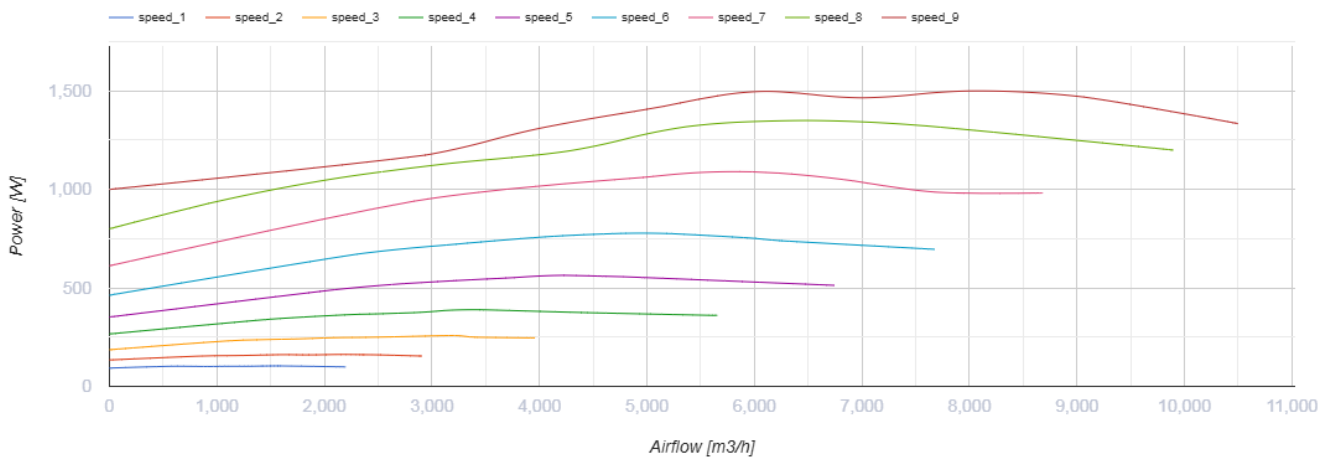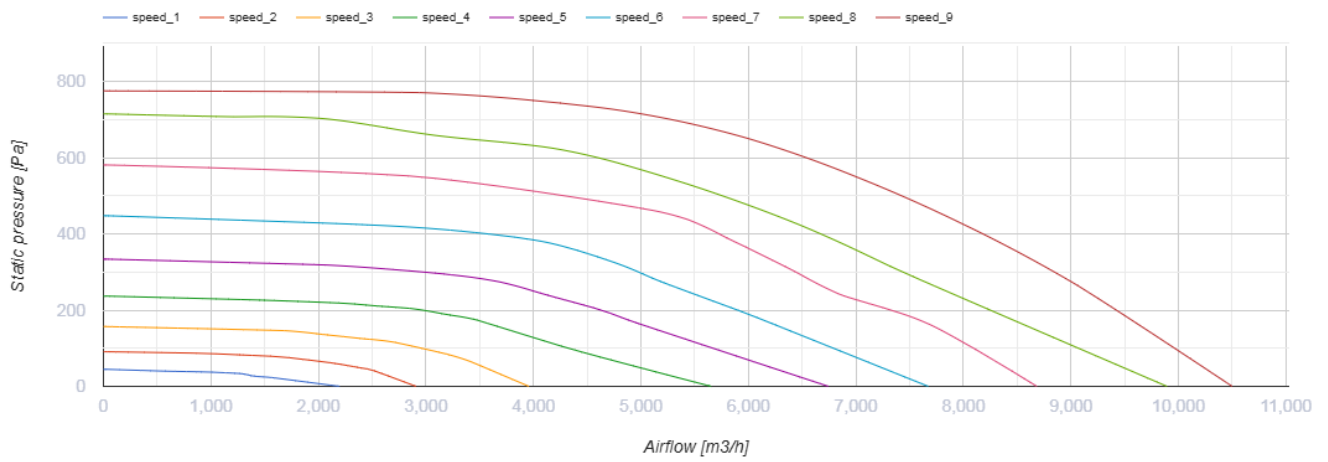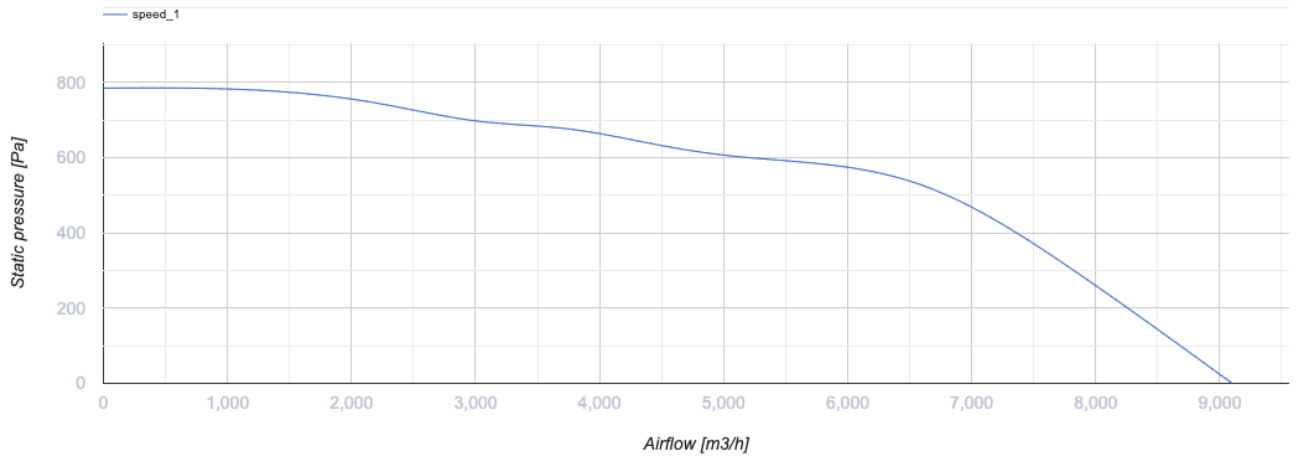

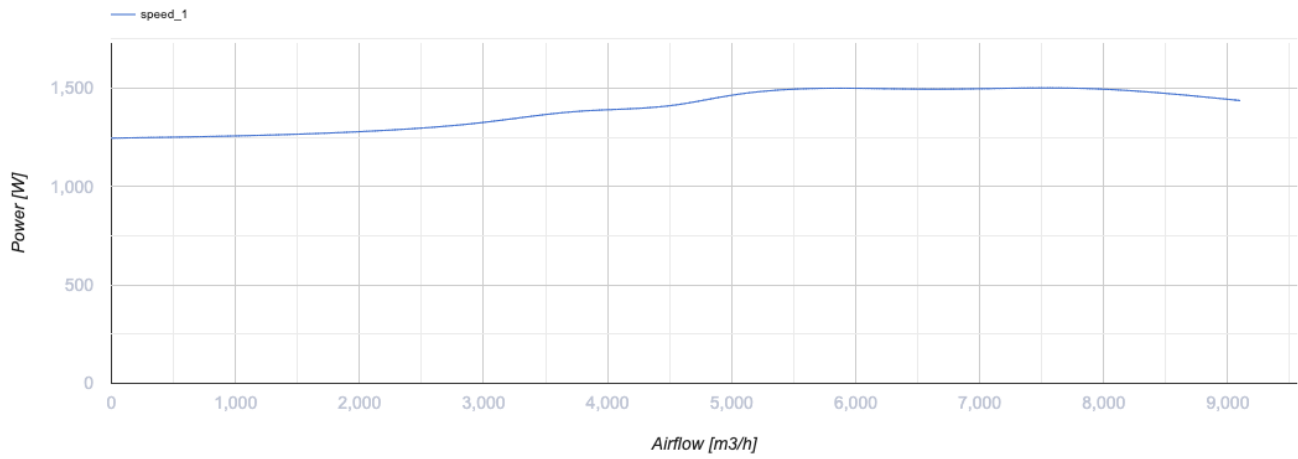

## Dimensions

<b>L</b>	<b>L1</b>	<b>H</b>	<b>H1</b>	<b>B</b>	<b>B1</b>	<b>A</b>	<b>C</b>
820	858	820	858	820	858	321	760

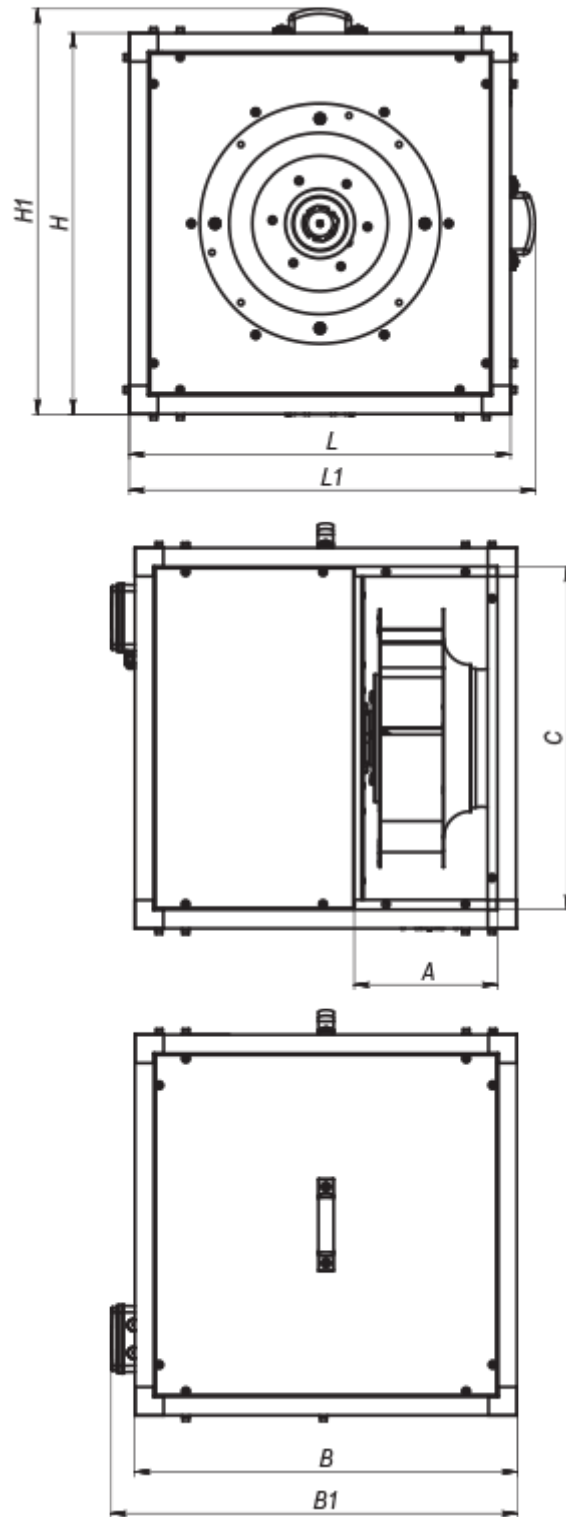

## Accessories

### Speed controllers

Name	Photo	Description
------	-------	-------------

[R-1/010](#)



Speed controller for EC motors