










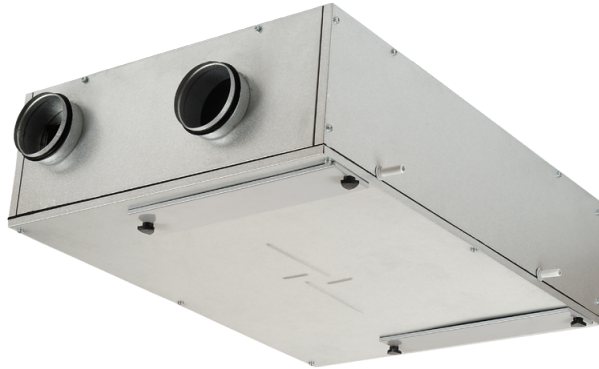



Series **VUT PB EC**



Suspended air handling units with a counterflow polystyrene heat exchanger

- Heat exchanger type: Counter flow
- Sound insulation
- Motor type: EC
- Bypass: Manual
- Reheater: Optional
- Preheater: Optional
- BMS protocol: ModBus
- Control: Remote Control
- Casing material: Galvanized steel
- Humidity sensor: Optional

Lineup	Connected air duct size, mm	Rated power, W	Maximum airflow, m ³ /h	Service side	Control system	Reheater	Preheater	BMS protocol
 VUT 160 PB EC R A21	125	50	190	Right	A21	Optional	Optional	ModBus
 VUT 250 PB EC R A21	125	101	270	Right	A21	Optional	Optional	ModBus
 VUT 350 PB EC R A21	160	170	410	Right	A21	Optional	Optional	ModBus
 VUT 160 PB EC L A21	125	50	190	Left	A21	Optional	Optional	ModBus
 VUT 160 PB EC L A14	125	50	190	Left	A14	×	×	×
 VUT 160 PB EC R A14	125	50	190	Right	A14	×	×	×
 VUT 250 PB EC L A21	125	101	270	Left	A21	Optional	Optional	ModBus

 VUT 250 PB EC L A14	125	101	270	Left	A14	×	×	×
 VUT 250 PB EC R A14	125	101	270	Right	A14	×	×	×
 VUT 350 PB EC L A21	160	170	410	Left	A21	Optional	Optional	ModBus
 VUT 350 PB EC L A14	160	170	410	Left	A14	×	×	×
 VUT 350 PB EC R A14	160	170	410	Right	A14	×	×	×